

DATA SHEET

# APD Series: Hermetic Ceramic Packaged Silicon PIN Diode Devices

## Applications

- Switches
- Attenuators

## Features

- Established PIN diode process
- Low capacitance designs
- Voltage ratings to 200 V
- Tight control of I layer base width



## Description

The Isolink APD series of silicon PIN diodes are designed for use as switch and attenuator devices in high-performance RF and microwave circuits. The PIN diode designs are useful over a wide range of frequencies from below 100 MHz to beyond 20 GHz. These devices use a well-established silicon technology resulting in PIN diodes with tightly controlled I-region characteristics.

The low capacitance and low resistance of the APD0505 through APD1520 diodes are ideal for switch applications that require insertion loss and fast switching speed. For switch or attenuator applications requiring high power and low distortion, the thick I-region and high reverse breakdown voltage of the APD2220 is ideal.

The absolute maximum ratings of the APD diode series are provided in Table 1. Electrical specifications are provided in Table 2. Typical performance characteristics are provided in Figures 1 through 6.

**Table 1. APD Series Absolute Maximum Ratings<sup>1</sup>**

Parameter	Symbol	Minimum	Typical	Maximum	Units
Power dissipation	P <sub>DIS</sub>			$\frac{\text{Maximum } T_J - \text{Case Temp}}{\text{Thermal Resistance}_{\text{junction-to-case}}}$	W
Reverse voltage	V <sub>R</sub>			See Voltage Rating column in Table 2	V
Forward current	I <sub>F</sub>			200	mA
Operating temperature	T <sub>OP</sub>	-65		+175	°C
Storage temperature	T <sub>STG</sub>	-65		+200	°C

<sup>1</sup> Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

**ESD HANDLING:** Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.

**Table 2. APD Series Electrical Specifications<sup>1</sup> (1 of 2)**  
(T<sub>OP</sub> = +25 °C, Unless Otherwise Noted)

Part Number	Total Capacitance (C <sub>T</sub> ) @ 50 V, (pF)	Total Capacitance (C <sub>T</sub> ) @ 0 V, (pF)	Series Resistance (R <sub>S</sub> ), @ 10 mA, (Ω)	Minority Carrier Lifetime (T <sub>L</sub> ) @ 10 mA (ns)	Voltage Rating <sup>2</sup> (V)	I-Region Thickness (μm)	Thermal Resistance (θ <sub>JC</sub> ) (°C/W)
	Maximum	Typical	Maximum	Typical	Minimum	Nominal	Maximum
<b>Switching Applications</b>							
APD0505-203	0.30	0.35	2.5	70	50	5	232
APD0505-210	0.30	0.35	2.5	70	50	5	133
APD0505-219	0.30	0.35	2.5	70	50	5	201
APD0505-240	0.30	0.35	2.5	70	50	5	214
APD0510-203	0.35	0.40	1.5	90	50	5	189
APD0510-210	0.35	0.40	1.5	90	50	5	90
APD0510-219	0.35	0.40	1.5	90	50	5	158
APD0510-240	0.35	0.40	1.5	90	50	5	170
APD0520-203	0.40	0.45	1.0	120	50	5	167
APD0520-210	0.50	0.55	1.0	120	50	5	59
APD0520-219	0.40	0.45	1.0	120	50	5	136
APD0520-240	0.40	0.45	1.0	120	50	5	148
APD0805-203	0.30	0.35	2.0	100	100	8	201
APD0805-210	0.35	0.40	2.0	100	100	8	107
APD0805-219	0.30	0.35	2.0	100	100	8	170
APD0805-240	0.30	0.35	2.0	100	100	8	182

**Table 2. APD Series Electrical Specifications<sup>1</sup> (2 of 2)**  
**(T<sub>OP</sub> = +25 °C, Unless Otherwise Noted)**

Part Number	Total Capacitance (C <sub>T</sub> ) @ 50 V, (pF)	Total Capacitance (C <sub>T</sub> ) @ 0 V, (pF)	Series Resistance (R <sub>s</sub> ), @ 10 mA, (Ω)	Minority Carrier Lifetime (T <sub>L</sub> ) @ 10 mA (ns)	Voltage Rating <sup>2</sup> (V)	I-Region Thickness (μm)	Thermal Resistance (θ <sub>Jc</sub> ) (°C/W)
	Maximum	Typical	Maximum	Typical	Minimum	Nominal	Maximum
<b>Switching Applications (continued)</b>							
APD0810-203	0.35	0.40	1.5	160	100	8	174
APD0810-210	0.40	0.45	1.5	160	100	8	75
APD0810-219	0.35	0.40	1.5	160	100	8	143
APD0810-240	0.35	0.40	1.5	160	100	8	155
APD1505-203	0.40	0.45 @ 10 V	2.5	350	200	15	172
APD1505-210	0.40	0.45 @ 10 V	2.5	350	200	15	74
APD1505-219	0.40	0.45 @ 10 V	2.5	350	200	15	142
APD1505-240	0.40	0.45 @ 10 V	2.5	350	200	15	150
APD1510-203	0.35	0.40	2.0	300	200	15	168
APD1510-210	0.35	0.40	2.0	300	200	15	70
APD1510-219	0.35	0.40	2.0	300	200	15	137
APD1510-240	0.35	0.40	2.0	300	200	15	149
APD1520-203	0.40	0.45	1.2	900	200	15	155
APD1520-210	0.40	0.45	1.2	900	200	15	57
APD1520-219	0.45	0.50	1.2	900	200	15	124
APD1520-240	0.40	0.45	1.2	900	200	15	136
<b>Attenuator Applications</b>							
APD2220-203	0.45	0.50	4.0	100	100	50	132
APD2220-210	0.45	0.50	4.0	100	100	50	32
APD2220-219	0.40	0.45	4.0	100	100	50	104
APD2220-240	0.40	0.45	4.0	100	100	50	115

<sup>1</sup> Performance is guaranteed only under the conditions listed in this table.

<sup>2</sup> Reverse current is specified at 10 μA maximum at the voltage rating noted. Do not exceed this voltage.

Typical Performance Characteristics at 25 °C

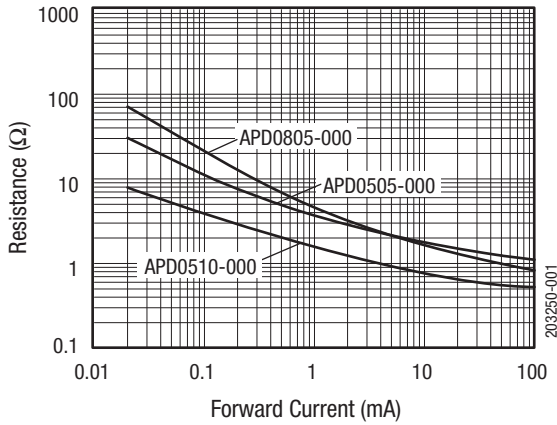


Figure 1. Resistance vs Forward Current @ 1 GHz

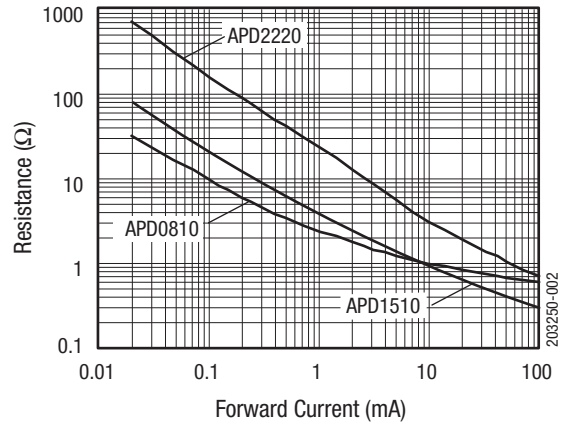


Figure 2. Resistance vs Forward Current @ 1 GHz

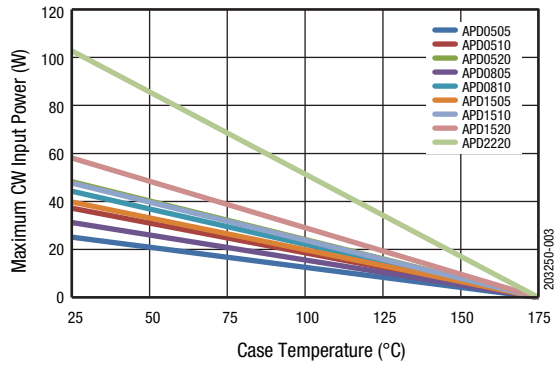


Figure 3. Maximum CW Input Power vs Case Temperature (-210 Package)

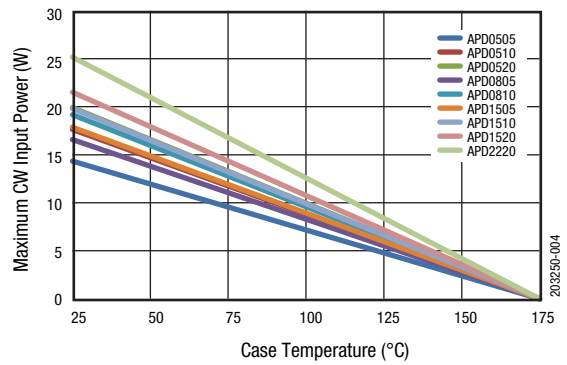


Figure 4. Maximum CW Input Power vs Case Temperature (-203 Package)

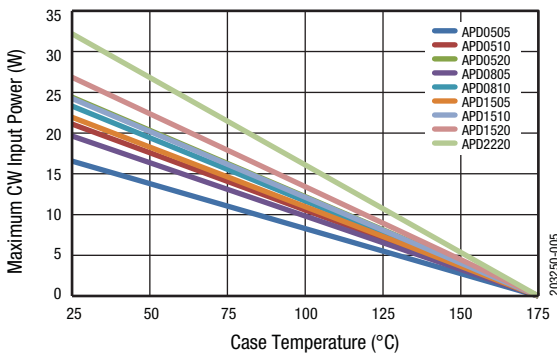


Figure 5. Maximum CW Input Power vs Case Temperature (-219 Package)


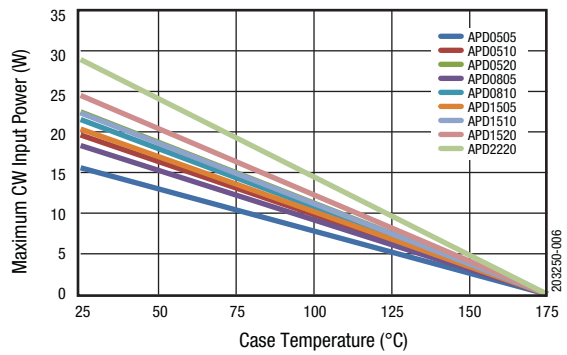


Figure 6. Maximum CW Input Power vs Case Temperature (-240 Package)


### Package Outline Drawings

Hermetic package outline dimension drawings are shown in Figures 7 through 10.

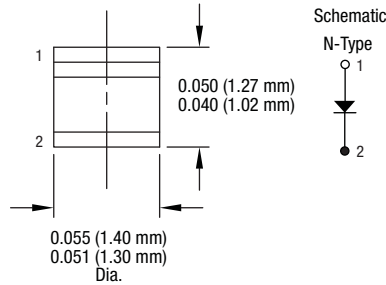

Dimensions are in inches (millimeters shown in parentheses) 203250-007


**Figure 7. -203 Package**

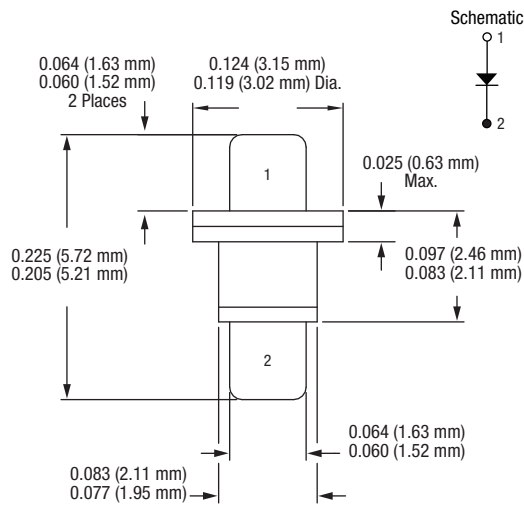


Dimensions are in inches (millimeters shown in parentheses) 203250-008

**Figure 8. -210 Package**

**DATA SHEET • APD SERIES: HERMETIC CERAMIC PACKAGED SILICON PIN DIODE DEVICES**

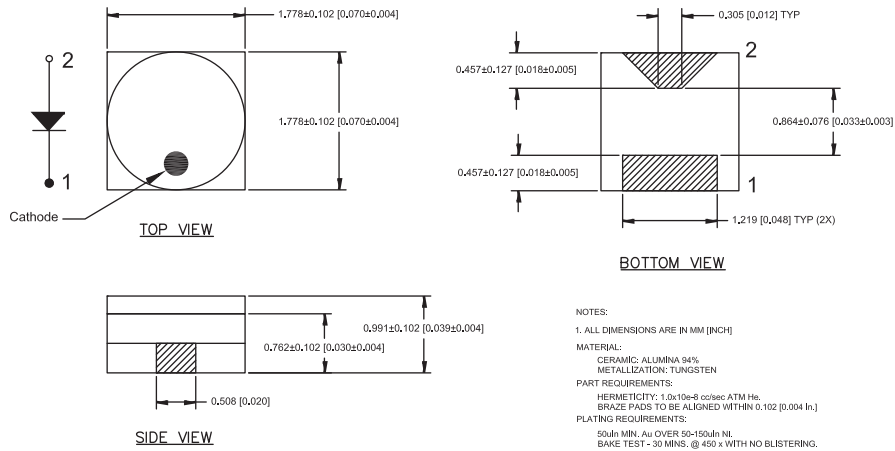

**Version A**

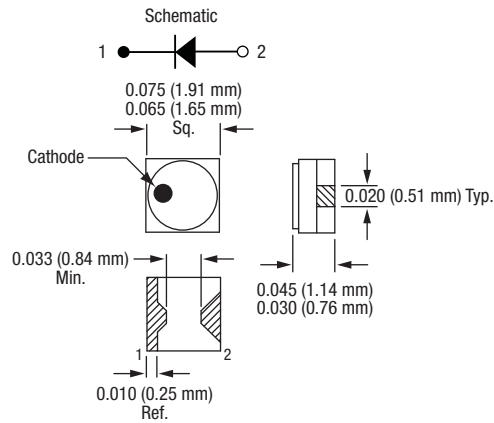


*Dimensions are in inches (millimeters shown in parentheses)*

**Version B**

203250-009

**Figure 9. -219 Package**

DATA SHEET • APD SERIES: HERMETIC CERAMIC PACKAGED SILICON PIN DIODE DEVICES

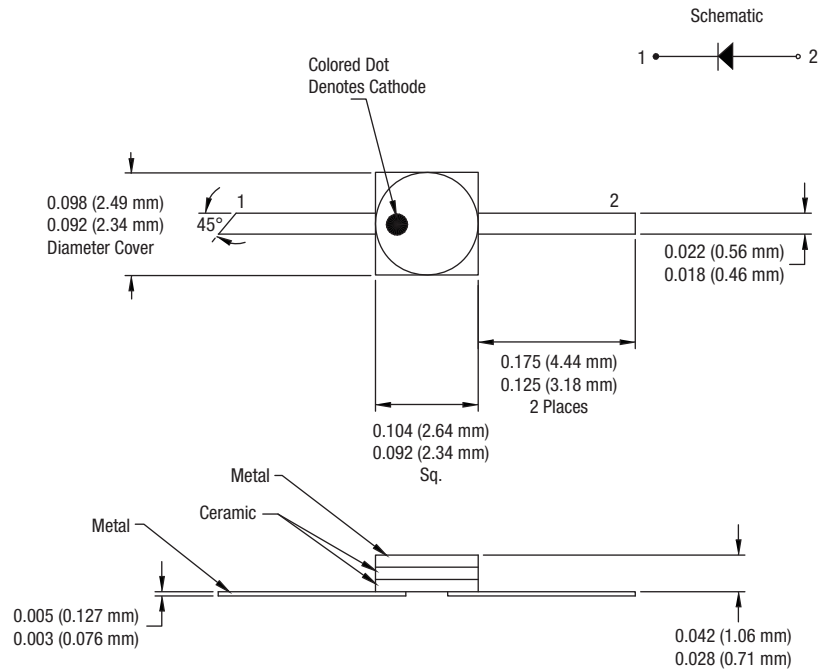

Dimensions are in inches (millimeters shown in parentheses)

203250-010

**Figure 10. -240 Package**

Copyright © 2014, 2017 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. ("Isolink"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Isolink Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.